


VA 802

CARRIAGE FOR 230 MM
RESTRAINT LENGTH

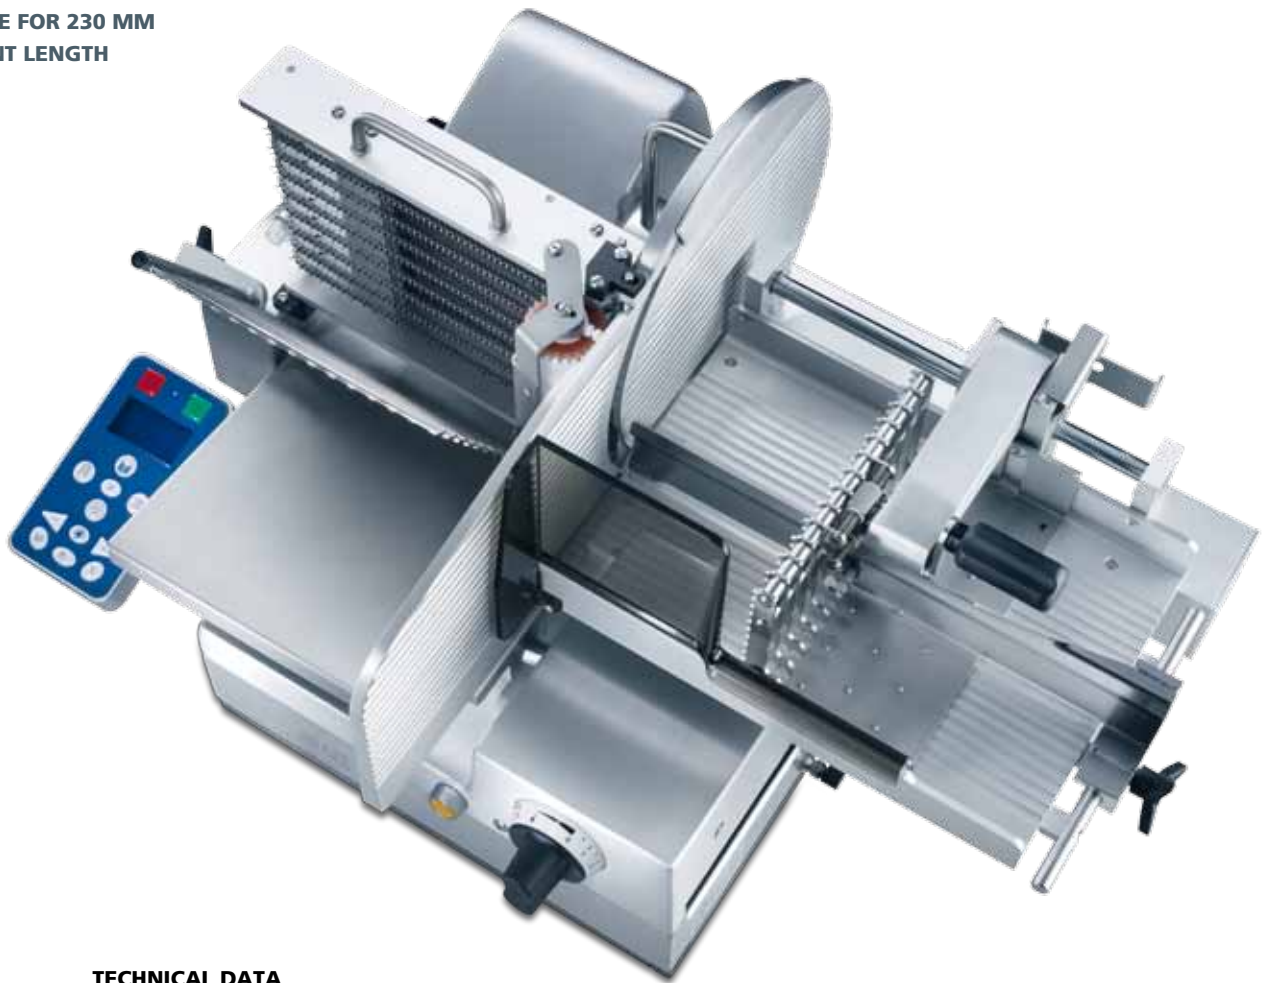

TECHNICAL DATA

Product no.	VA 802	
Motor power	500 watts	230 V~ alternating or 400 V~ three-phase current
Blade (Ø mm)	Ø 300 mm, smooth, solid steel blade	
Blade speed	229/rpm	
Slices per minute max.	70/rpm	
Slice thickness min. - max. (mm)	0.5 – 10 mm	
Stack height	60 mm	
Slicing speed	30 - 70 strokes / min.	
Emission noise level	< 69 dBA	
Slice size (L x H mm)	180 x 250 mm	
Interface	serial	
Placement facilities	Stacking, longitudinal and traverse bays, Round placement (depending on the model)	
Restraint length (mm)	230 mm	
Slicing product size with transport chain (mm)	max. 240 x 180 mm / min. 30 x 30 mm	
Footprint (L x W mm)	540 x 440 mm	
Exterior dimensions (L x W x H)	600 x 880 x 500 mm	
Workspace (L x W x H)	700 x 900 x 640 mm	
Net weight	69 kg	
Operating period	Continuous duty	
Warranty	1 year	

ACCESSORIES

- Removable, 2-disc blade sharpener
- Special oil
- Robust cleaning brush

OPTIONS

- Machine table (Mati 1) made of stainless steel
(L x W x H) 656 x 553 x max. 720 mm
- Machine table (Mati 2) made of stainless steel, on rollers
(L x W x H) 656 x 520 x max. 776 mm



Mati 1



Mati 2

