


VA 806

CARRIAGE FOR
600 MM RESTRAINT LENGTH

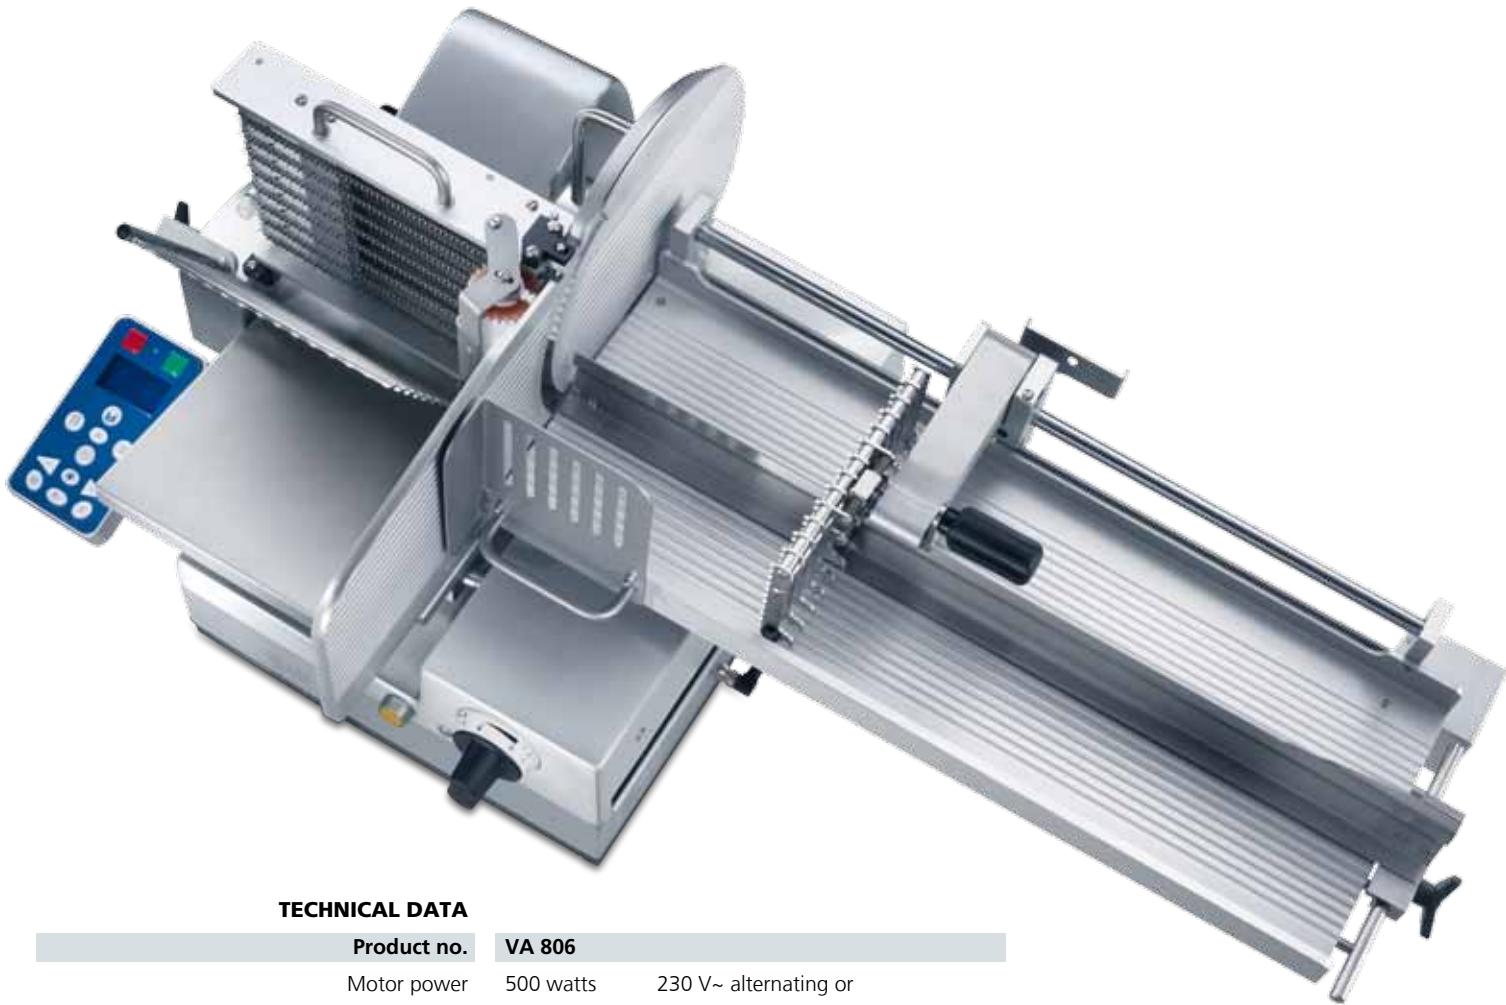

TECHNICAL DATA

Product no.	VA 806
Motor power	500 watts 230 V~ alternating or 400 V~ three-phase current
Blade (Ø mm)	Ø 300 mm, smooth, solid steel blade
Blade speed	229/rpm
Slices per minute max.	55/rpm
Slice thickness min. - max. (mm)	0.5 – 10 mm
Stack height	60 mm
Slicing speed	30 - 55 strokes / min.
Emission noise level	< 69 dBA
Slice size (L x H mm)	180 x 250 mm
Interface	serial
Placement facilities	Stacking, longitudinal and traverse bays, Round placement (depending on the model)
Restraint length (mm)	600 mm
Slicing product size with transport chain (mm)	max: 240 x 180 mm / min: 30 x 30 mm
Footprint (L x W mm)	540 x 440 mm
Exterior dimensions (L x W x H)	600 x 1240 x 500 mm
Workspace (L x W x H)	700 x 1280 x 640 mm
Net / gross weight	78 kg / 108 kg
Operating period	Continuous duty
Warranty	1 year

ACCESSORIES

- Removable, 2-disc blade sharpener
- Special oil
- Robust cleaning brush

OPTIONS

- Machine table (Mati 1) made of stainless steel
(L x W x H) 656 x 553 x max. 720 mm
- Machine table (Mati 2) made of stainless steel, on rollers
(L x W x H) 656 x 520 x max. 776 mm



Mati 1



Mati 2

